



PROTECTIVE COVERS


D38999 SERIES - III



NCAGE CODE: TD589

WWW.ATPSAVUNMA.COM
info@atpsavunma.com

D38999/32 & D38999/33 PROTECTIVE COVER

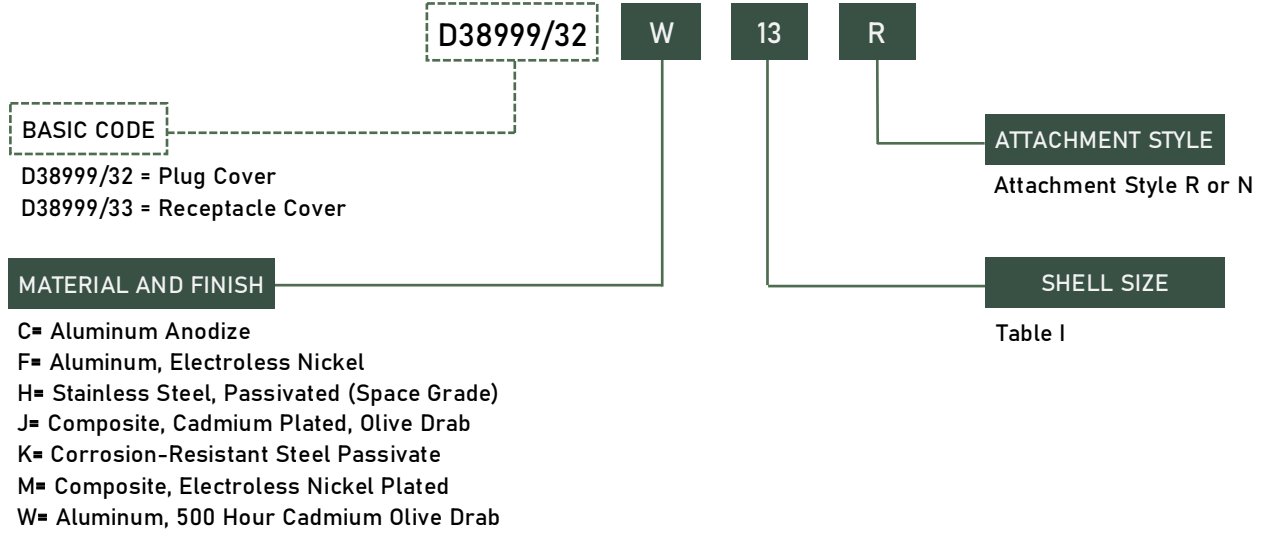

FINISH SPECIFICATIONS					
ITEM	FINISH CODE	BASE MATERIAL	SPECIFICATION	TEMP RANGE	SALT SPRAY RATING (HR)
ALUMINUM	-	ALUMINUM	QQ-A-225/8	-65 to +200°C	0
HARD ANODIZE	C	ALUMINUM	PER MIL-A-8685	-65 to +175°C	300
ELECTROLESS NICKEL	F	ALUMINUM	AMS-C-26074	-65 to +200°C	48
STAINLESS STEEL, PASSIVATED	H	STAINLESS STEEL	QQ-S-763 (300 SERIES)	-65 to +200°C	1000
COMPOSITE, CADMIUM PLATED, OLIVE DRAB	J	ULTEM	SAE-AMS-QQ-P-416 TYPE II, CLASS 3 OVER ELECTROLESS NICKEL	-65 to +175°C	2000
COMPOSITE, ELECTROLESS NICKEL PLATED	M	ULTEM	AMS-C-26074	-65 to +175°C	2000
CADMIUM, OLIVE DRAB	W	ALUMINUM	SAE-AMS-QQ-P-416 TYPE II, CLASS 2 OVER ELECTROLESS NICKEL	-65 to +175°C	500

MATERIAL	
Shell	Aluminum Alloy
Gasket	Fluorosilicone
Rope	Stainless Steel
Ring	Stainless Steel


STANDARDS	
EIA/ECA-364-26	
FED-STD-H28	
MIL-S-7742	
IP69K	



D38999/32 & D38999/33 PROTECTIVE COVER

D38999/32 PLUG COVER

** Rope Length
127.0 (5.000)
+13.0 (+.500)
-7.0 (-.250)

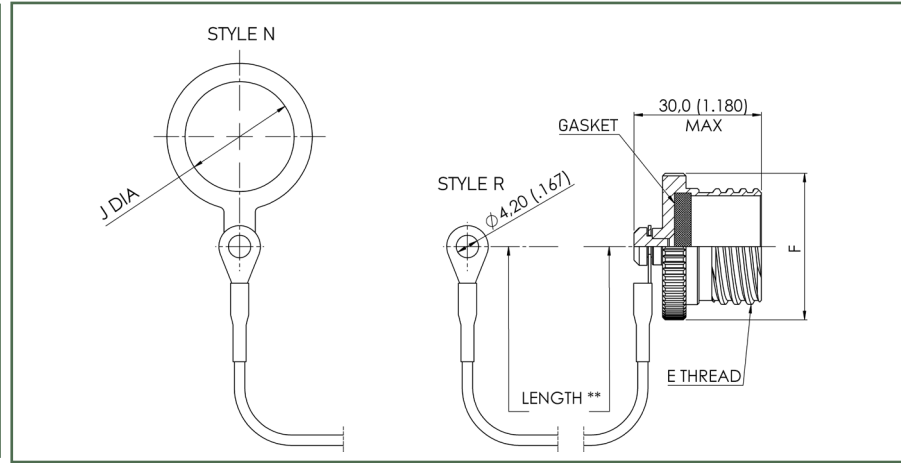

D38999/33 RECEPTACLE COVER

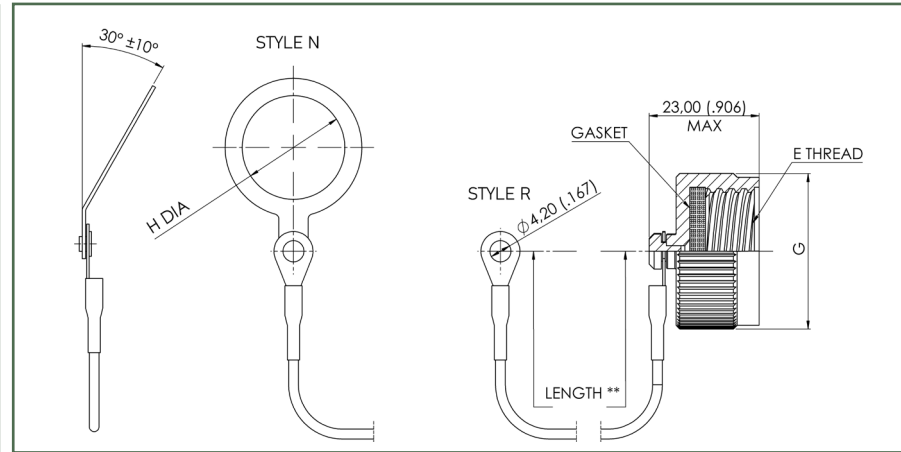


TABLE I: Shell Size, Thread and Dimensions

Shell Size	E Thread	F max.	G max.	H min.	J min.
9	.6250-0.1P-0.3L-TS	23,0 (.906)	23,0 (.906)	17,6 (.694)	13,0 (.512)
11	.7500-0.1P-0.3L-TS	26,0 (1.024)	28,0 (1.102)	22,0 (.865)	18,0 (.709)
13	.8750-0.1P-0.3L-TS	31,0 (1.220)	31,0 (1.220)	25,1 (.989)	20,0 (.787)
15	1.0000-0.1P-0.3L-TS	33,0 (1.300)	32,0 (1.260)	29,9 (1.178)	23,0 (.906)
17	1.1875-0.1P-0.3L-TS	37,0 (1.457)	37,0 (1.457)	32,0 (1.260)	26,0 (1.024)
19	1.2500-0.1P-0.3L-TS	40,0 (1.575)	39,0 (1.535)	36,3 (1.428)	29,0 (1.142)
21	1.3750-0.1P-0.3L-TS	44,0 (1.732)	42,0 (1.654)	38,3 (1.506)	32,0 (1.260)
23	1.5000-0.1P-0.3L-TS	46,0 (1.811)	45,0 (1.772)	42,6 (1.678)	34,0 (1.339)
25	1.6250-0.1P-0.3L-TS	50,0 (1.969)	49,0 (1.929)	44,5 (1.750)	39,0 (1.535)

Dimensions in brackets () are in inches.

