


The background of the entire page is a close-up photograph of numerous crimp contacts. These are metallic components with cylindrical bodies and flat, circular contact surfaces. They are arranged in rows, with some in the foreground being in sharp focus and others in the background being blurred, creating a sense of depth. The lighting is bright, highlighting the metallic texture and the precision of the manufacturing.

Crimp Contacts

NCAGE CODE: TD589
www.atpsavunma.com

2025

VG95234 / TR95234 ||| Pin contacts

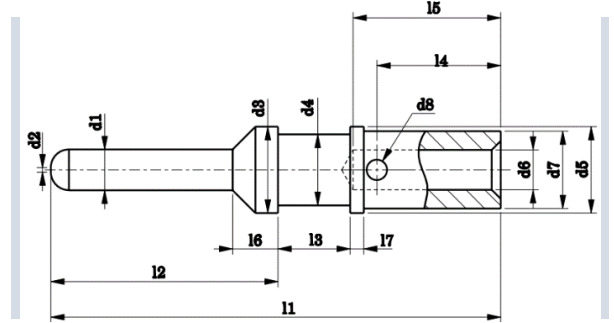



Contact Size			Part Number		d ₁ -0,05	d ₂ max.	d ₃	d ₄	d ₅	d ₆	d ₇
Size	mm ²	AWG	VG95234	TR95234							
10	0,5-1,0	20/18	VG95234P10	TR95234P10	1,04	0,4	2,0 ^{-0,05}	1,5 ^{-0,05}	2,6 ^{-0,10}	1,50 ^{+0,05}	2,40 ^{-0,05}
	0,2-0,4	26/22	VG95234P10-001	TR95234P10-001						1,50 ^{+0,05}	
15S	0,75-1,5	18/16	VG95234P15S	TR95234P15S	1,60	0,4	3,2 ^{-0,10}	1,75 ^{-0,10}	3,2 ^{-0,10}	1,75 ^{+0,08}	2,75 ^{-0,05}
	0,3-0,6	22/20	VG95234P15S-001	TR95234P15S-001						0,90 ^{+0,05}	
	0,14-0,38	22/26	VG95234P15S-002	TR95234P15S-002						1,20 ^{+0,10}	
15	0,75-1,5	18/16	VG95234P15	TR95234P15	1,60	0,4	3,2 ^{-0,10}	1,75 ^{-0,10}	3,2 ^{-0,10}	1,75 ^{+0,08}	2,75 ^{-0,05}
	0,3-0,6	22/20	VG95234P15-001	TR95234P15-001						0,90 ^{+0,05}	
	0,14-0,38	22/26	VG95234P15-002	TR95234P15-002						1,20 ^{+0,10}	
25	2,0-3,0	14/12	VG95234P25	TR95234P25	2,40	0,4	4,8 ^{-0,10}	3,30 ^{-0,15}	4,8 ^{-0,10}	2,50 ^{+0,10}	3,80 ^{-0,10}
	0,75-1,5	18/16	VG95234P25-001	TR95234P25-001						1,75 ^{+0,08}	3,40 ^{-0,05}
60	6,0	10	VG95234P60	TR95234P60	3,60	0,4	7,6 ^{-0,20}	6,25 ^{-0,15}	7,6 ^{-0,20}	3,50 ^{+0,10}	6,80 ^{-0,10}
	2,0-3,0	14/12	VG95234P60-001	TR95234P60-001						2,50 ^{+0,05}	
-	-	8	VG95234P8	TR95234P8	3,60	0,4	7,6 ^{-0,20}	6,25 ^{-0,15}	7,6 ^{-0,20}	4,55 ^{+0,10}	6,80 ^{-0,10}
100	10,0	-	VG95234P100	TR95234P100	3,60	0,4	7,6 ^{-0,20}	6,25 ^{-0,15}	7,6 ^{-0,20}	4,80 ^{+0,10}	6,80 ^{-0,10}
160	16,0	-	VG95234P160	TR95234P160	5,75	2,5	11,2 ^{-0,20}	9,55 ^{-0,15}	11,2 ^{-0,20}	6,20 ^{+0,15}	9,55 ^{-0,10}
	-	6	VG95234P160-001	TR95234P160-001						5,70 ^{+0,10}	
-	-	4	VG95234P4	TR95234P4	5,75	2,5	11,2 ^{-0,20}	9,55 ^{-0,15}	11,2 ^{-0,20}	7,10 ^{+0,15}	9,55 ^{-0,10}
500	50,0	-	VG95234P500	TR95234P500	9,10	5,8	15,15 ^{-0,20}	13,55 ^{-0,15}	15,15 ^{-0,20}	10,70 ^{+0,15}	14,35 ^{-0,10}
	25,0	4	VG95234P500-001	TR95234P500-001						7,60 ^{+0,15}	
	35,0	2	VG95234P500-002	TR95234P500-002						9,10 ^{+0,15}	
-	-	0	VG95234P0	TR95234P0	9,10	5,8	15,15 ^{-0,20}	13,55 ^{-0,15}	15,15 ^{-0,20}	11,50 ^{+0,15}	14,35 ^{-0,10}

Contact Size			Part Number		d ₈ ±0,1	l ₁ ±0,2	l ₂ ±0,15	l ₃ ±0,1	l ₄ ±0,5	l ₅ min.	l ₆	l ₇
Size	mm ²	AWG	VG95234	TR95234								
10	0,5-1,0	20/18	VG95234P10	TR95234P10	0,7	28,4	11,3	4,75	3,4	4,6	1,3 ^{±0,10}	0,8 ^{±0,10}
	0,2-0,4	26/22	VG95234P10-001	TR95234P10-001								
15S	0,75-1,5	18/16	VG95234P15S	TR95234P15S	1,0	27,4	13,9	3,85	5,6	6,8	2,4 ^{±0,20}	3,2 ^{±0,20}
	0,3-0,6	22/20	VG95234P15S-001	TR95234P15S-001								
	0,14-0,38	22/26	VG95234P15S-002	TR95234P15S-002								
15	0,75-1,5	18/16	VG95234P15	TR95234P15	1,0	31,4	13,9	7,90	5,6	6,8	2,4 ^{±0,20}	3,2 ^{±0,20}
	0,3-0,6	22/20	VG95234P15-001	TR95234P15-001								
	0,14-0,38	22/26	VG95234P15-002	TR95234P15-002								
25	2,0-3,0	14/12	VG95234P25	TR95234P25	1,8	37,0	18,3	7,90	5,6	6,8	2,4 ^{±0,20}	3,8 ^{±0,20}
	0,75-1,5	18/16	VG95234P25-001	TR95234P25-001								
60	6,0	10	VG95234P60	TR95234P60	1,8	39,6	20,0	6,35	11,0	12,0	4,0 ^{±0,20}	1,2 ^{±0,20}
	2,0-3,0	14/12	VG95234P60-001	TR95234P60-001								
-	-	8	VG95234P8	TR95234P8	1,8	39,6	20,0	6,35	11,0	12,0	4,0 ^{±0,20}	1,2 ^{±0,20}
100	10,0	-	VG95234P100	TR95234P100	1,8	39,6	20,0	6,35	11,0	12,0	4,0 ^{±0,20}	1,2 ^{±0,20}
160	16,0	-	VG95234P160	TR95234P160	1,8	39,6	20,0	6,35	11,0	12,0	4,0 ^{±0,20}	1,2 ^{±0,20}
	-	6	VG95234P160-001	TR95234P160-001								
-	-	4	VG95234P4	TR95234P4	1,8	39,6	20,0	6,35	11,0	12,0	4,0 ^{±0,20}	1,2 ^{±0,20}
500	50,0	-	VG95234P500	TR95234P500	1,8	41,0	20,0	6,35	12,3	14,0	4,0 ^{±0,20}	1,2 ^{±0,20}
	25,0	4	VG95234P500-001	TR95234P500-001								
	35,0	2	VG95234P500-002	TR95234P500-002								
-	-	0	VG95234P0	TR95234P0	1,8	41,0	20,0	6,35	12,3	14,0	4,0 ^{±0,20}	1,2 ^{±0,20}



VG95234 / TR95234 ||| Socket contacts

Size 10; 15S; 15; 25

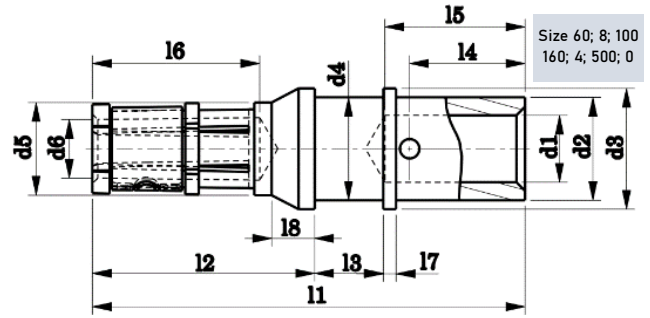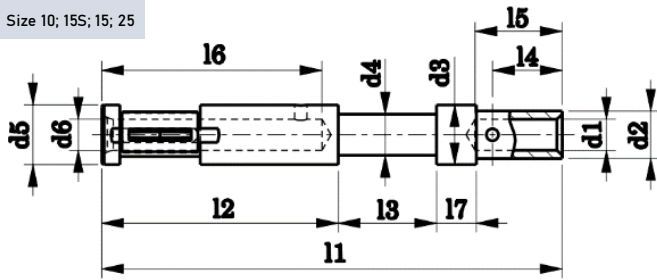

Contact Size			Part Number		d ₁	d ₂	d ₃	d ₄	d ₅	d ₆	l ₁
Size	mm ²	AWG	VG95234	TR95234							
10	0,5-1,0	20/18	VG95234S10	TR95234S10	1,50 ^{+0,05}	2,40 ^{-0,05}	2,6 ^{-0,10}	1,50 ^{-0,05}	2,0 ^{-0,10}	1,07 ^{+0,20}	36,8 ^{±0,30}
	0,2-0,4	26/22	VG95234S10-001	TR95234S10-001	0,90 ^{+0,05}						
15S	0,75-1,5	18/16	VG95234S15S	TR95234S15S	1,75 ^{+0,08}	2,75 ^{-0,05}	3,2 ^{-0,15}	1,75 ^{-0,10}	3,2 ^{-0,15}	1,65 ^{+0,30}	29,1 ^{±0,20}
	0,3-0,6	22/20	VG95234S15S-001	TR95234S15S-001	0,90 ^{+0,05}						
	0,14-0,38	22/26	VG95234S15S-002	TR95234S15S-002	1,20 ^{+0,10}						
15	0,75-1,5	18/16	VG95234S15	TR95234S15	1,75 ^{+0,08}	2,75 ^{-0,05}	3,2 ^{-0,15}	1,75 ^{-0,10}	3,2 ^{-0,15}	1,65 ^{+0,30}	37,8 ^{±0,20}
	0,3-0,6	22/20	VG95234S15-001	TR95234S15-001	0,90 ^{+0,05}						
	0,14-0,38	22/26	VG95234S15-002	TR95234S15-002	1,20 ^{+0,10}						
25	2,0-3,0	14/12	VG95234S25	TR95234S25	2,50 ^{+0,10}	3,80 ^{-0,10}	4,8 ^{-0,10}	3,30 ^{-0,10}	4,8 ^{-0,10}	2,45 ^{+0,30}	37,0 ^{±0,20}
	0,75-1,5	18/16	VG95234S25-001	TR95234S25-001	1,75 ^{+0,10}						
60	6,0	10	VG95234S60	TR95234S60	3,50 ^{+0,20}	6,80 ^{-0,10}	7,6 ^{-0,20}	6,25 ^{-0,20}	6,5 ^{-0,20}	3,65 ^{±0,05}	40,1 ^{±0,20}
	2,0-3,0	14/12	VG95234S60-001	TR95234S60-001	2,50 ^{+0,05}						
-	-	8	VG95234S8	TR95234S8	4,55 ^{+0,10}	6,80 ^{-0,10}	7,6 ^{-0,20}	6,25 ^{-0,20}	6,25 ^{-0,20}	3,65 ^{±0,05}	40,1 ^{±0,20}
100	10,0	-	VG95234S100	TR95234S100	4,80 ^{+0,10}	6,80 ^{-0,10}	7,6 ^{-0,20}	6,25 ^{-0,20}	6,25 ^{-0,20}	3,65 ^{±0,05}	40,1 ^{±0,20}
160	16,0	-	VG95234S160	TR95234S160	6,20 ^{+0,15}	9,55 ^{-0,10}	11,2 ^{-0,20}	9,55 ^{-0,20}	8,6 ^{-0,20}	5,80 ^{±0,05}	40,1 ^{±0,20}
	-	6	VG95234S160-001	TR95234S160-001	5,70 ^{+0,10}						
-	-	4	VG95234S4	TR95234S4	7,10 ^{+0,15}	9,55 ^{-0,10}	11,2 ^{-0,20}	9,55 ^{-0,20}	8,6 ^{-0,20}	5,80 ^{±0,05}	40,1 ^{±0,20}
500	50,0	-	VG95234S500	TR95234S500	10,70 ^{+0,15}	14,35 ^{-0,10}	15,15 ^{-0,20}	13,55 ^{-0,20}	13,2 ^{-0,20}	9,15 ^{±0,05}	41,6 ^{±0,20}
	25,0	4	VG95234S500-001	TR95234S500-001	7,60 ^{+0,15}						
	35,0	2	VG95234S500-002	TR95234S500-002	9,10 ^{+0,15}						
-	-	0	VG95234S0	TR95234S0	11,50 ^{+0,15}	14,35 ^{-0,10}	15,15 ^{-0,20}	13,55 ^{-0,20}	13,2 ^{-0,20}	9,15 ^{±0,05}	41,6 ^{±0,20}

Contact Size			Part Number		l ₂	l ₃ ±0,1	l ₄ ±0,5	l ₅ min.	l ₆ min.	l ₇	l ₈ ±0,2
Size	mm ²	AWG	VG95234	TR95234							
10	0,5-1,0	20/18	VG95234S10	TR95234S10	19,7 ^{±0,25}	4,75	3,4	4,6	7,5	0,8 ^{±0,30}	-
	0,2-0,4	26/22	VG95234S10-001	TR95234S10-001							
15S	0,75-1,5	18/16	VG95234S15S	TR95234S15S	15,1 ^{±0,20}	3,90	5,6	6,8	10	3,3 ^{±0,10}	-
	0,3-0,6	22/20	VG95234S15S-001	TR95234S15S-001							
	0,14-0,38	22/26	VG95234S15S-002	TR95234S15S-002							
15	0,75-1,5	18/16	VG95234S15	TR95234S15	19,8 ^{±0,20}	7,90	5,6	6,8	10	3,3 ^{±0,10}	-
	0,3-0,6	22/20	VG95234S15-001	TR95234S15-001							
	0,14-0,38	22/26	VG95234S15-002	TR95234S15-002							
25	2,0-3,0	14/12	VG95234S25	TR95234S25	19,0 ^{±0,15}	7,90	5,6	6,8	15	3,2 ^{±0,20}	-
	0,75-1,5	18/16	VG95234S25-001	TR95234S25-001							
60	6,0	10	VG95234S60	TR95234S60	20,6 ^{±0,15}	6,35	11,0	12,0	15	1,2 ^{±0,20}	4
	2,0-3,0	14/12	VG95234S60-001	TR95234S60-001							
-	-	8	VG95234S8	TR95234S8	20,6 ^{±0,15}	6,35	11,0	12,0	15	1,2 ^{±0,20}	4
100	10,0	-	VG95234S100	TR95234S100	20,6 ^{±0,15}	6,35	11,0	12,0	15	1,2 ^{±0,20}	4
160	16,0	-	VG95234S160	TR95234S160	20,6 ^{±0,15}	6,35	11,0	12,0	15	1,2 ^{±0,20}	4
	-	6	VG95234S160-001	TR95234S160-001							
-	-	4	VG95234S4	TR95234S4	20,6 ^{±0,15}	6,35	11,0	12,0	15	1,2 ^{±0,20}	4
500	50,0	-	VG95234S500	TR95234S500	20,6 ^{±0,15}	6,35	12,3	14,0	15	1,2 ^{±0,20}	4
	25,0	4	VG95234S500-001	TR95234S500-001							
	35,0	2	VG95234S500-002	TR95234S500-002							
-	-	0	VG95234S0	TR95234S0	20,6 ^{±0,15}	6,35	12,3	14,0	15	1,2 ^{±0,20}	4



VG95234 / TR95234 ||| Contacts

Contact Size		Part Number		Applicable wire			
Metrical	AWG	VG95234	TR95234	mm ²		AWG	
				for	to	for	to
10	-	VG95234X10	TR95234X10	0,50	1,00	20	18
		VG95234X10-001	TR95234X10-001	0,14	0,38	26	22
15S	-	VG95234X15S	TR95234X15S	0,75	1,50	18	16
		VG95234X15S-001	TR95234X15S-001	0,14	0,38	26	22
		VG95234X15S-002	TR95234X15S-002	0,30	0,60	22	20
15	-	VG95234X15	TR95234X15	0,75	1,50	18	16
		VG95234X15-001	TR95234X15-001	0,14	0,38	26	22
		VG95234X15-002	TR95234X15-002	0,30	0,60	22	20
25	-	VG95234X25	TR95234X25	2,00	3,00	14	12
		VG95234X25-001	TR95234X25-001	0,75	1,50	18	16
60	-	VG95234X60	TR95234X60	6,00		10	
		VG95234X60-001	TR95234X60-001	2,00	3,00	14	12
-	8	VG95234X8	TR95234X8	-		-	
100	-	VG95234X100	TR95234X100	10,0		-	
160	-	VG95234X160	TR95234X160	16,0		-	
		VG95234X160-001	TR95234X160-001	-		6	
-	4	VG95234X4	TR95234X4	-		4	
500	-	VG95234X500	TR95234X500	50,0		-	
		VG95234X500-001	TR95234X500-001	25,0		4	
		VG95234X500-002	TR95234X500-002	35,0		2	
-	0	VG95234X0	TR95234X0	-		0	

